

SILENCER/OUTLET DUCT

SILENCER/OUTLET DUCT FOR DOWNDRAFT TABLE

The silencer/outlet duct is used as a silencer and prevents dust from blowing up from the floor at the same time. In case the silencer/outlet duct is used in a welding cabin, it also prevents air turbulence in the cabin and air disturbance to the adjacent cabin, if any. The silencer/outlet duct can be connected to the HEPA kit or directly to the outlet of the downdraft table.


It is not suitable to be connected to a duct system.



SPECIFICATIONS

■ Physical dimensions and properties	
Material	sheet metal
Colour	black RAL 9005 (gloss level 85%)
Weight (net)	38,5 kg (84.9 lbs)
■ Performance	
Sound level downdraft table:	
• without silencer/outlet duct	• 74 dB(A)
• with silencer/outlet duct	• 69 dB(A)
• with silencer/outlet duct and HEPA kit	• 67 dB(A)
■ Product combinations	
DraftMax Basic	downdraft table with disposable filter
DraftMax Advance	downdraft table with manual self-cleaning filter
DraftMax Ultra	downdraft table with automatic self-cleaning filter
■ Scope of supply	
Upper shaft with top grid - Lower shaft - Draught strip - Mounting material	
■ Order information	
Article number	0040100010
Number/package	1 (two-piece)
■ Shipping data	
Gross weight	2 * 20 kg (2 * 44.1 lbs)
Packing dimensions	<ul style="list-style-type: none"> • box 1/2: 1080 x 700 x 180 mm (42.5 x 27.6 x 7.1 in.) • box 2/2: 1080 x 700 x 180 mm (42.5 x 27.6 x 7.1 in.)
Harmonized Tariff Code	8421.39.2090
Country of origin	the Netherlands

DIMENSIONS

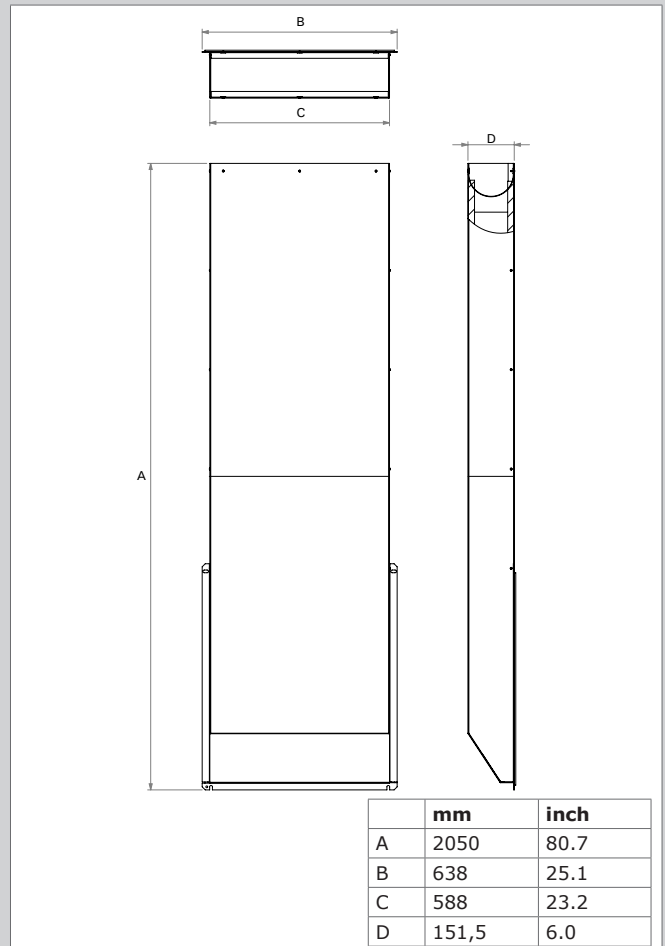

Product type	Silencer/Outlet duct
Article no.	0040100010
Product category	options and accessories
Version	041013/C

Always check the latest version on www.plymovent.com.